


50 MHz Low Pass Filter by K1WHS

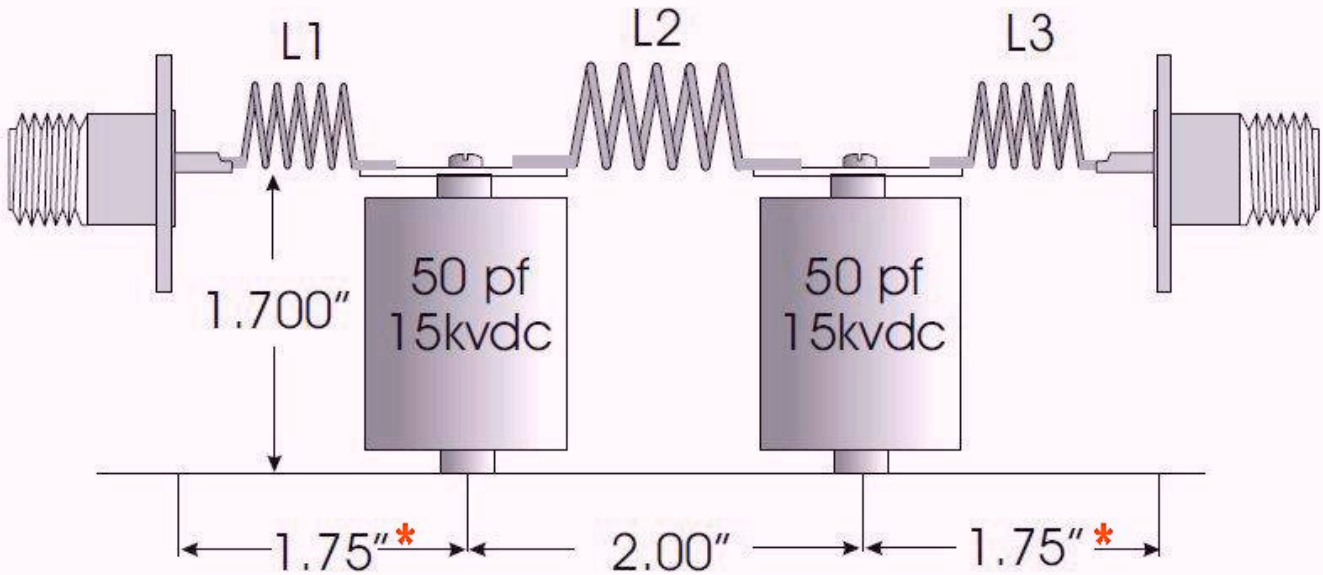

Coil Data:

- L1, L3 5 turns #12 AWG Copper wire, on 7/16" Form, approx 0.8" long
- L2: 6 turns #12 AWG Copper wire on 5/8" Form, approx. 0.95" long.

Typical performance:

50.1 Mhz	0.04 dB loss	-30 dB RL
100 Mhz	24 dB loss	
150 Mhz	45 dB loss	
200 Mhz.	60 dB loss	

* NOTE: The builder may find it more convenient to allow 2.00" to each chassis end panel, thereby permitting standard sized ring terminals to be used in joining the coils to the capacitors.